

BURDENMASTER™

Versatile Gasoline Utility Vehicle

| MODEL | G1-50 | |
|-------------------------|----------|-------------------|
| TYPE | Gasoline | |
| SPEED (MAX MPH) | 18 | (29 kmh) |
| RANGE (MILES) | 100 | (161 km) |
| LOAD CAPACITY (lbs) | 1,500 | (680 kg) |
| BED SIZE (W"xL") | 43"x75" | (109 cm x 190 cm) |
| TURNING RADIUS (INCHES) | 125" | (312 cm) |

Based on Standard Configuration

*Typical capacity: Actual load capacity depends on application and vehicle configuration



Tough and Dependable Product Solutions

The G1-50's versatile design allows the vehicle to be built to your specific needs. Equipped with an 18 hp four stroke engine that delivers plenty of power through a variable pitch torque converter, the Burdenmaster is ideal for 24-hour-a-day applications.

The vehicle travels at speeds up to 18 mph and hauls up to 1,500 lbs. of load. Optional configurations for 4 or 6 passengers and built-in tool storage areas, make model G1-50 one of the most versatile designs in the industry.

The vehicle's unique delta suspension system includes rear coil springs and shock absorbers, providing a comfortable ride in rugged applications.

Equipped standard with four wheel brakes, dual headlights, taillights and stop lights, the Burdenmaster is the best value in its class of vehicles.

Model G1-50 configured with steel cab and doors makes it ideal for outdoor utility applications. With its 18 mph speed, versatility, and maneuverability, Burdenmaster is the ideal solution.

With more than 150,000 vehicles in service and over 50 years experience in providing solutions to our customers, Taylor-Dunn products are the best way to go about your business.

Vehicles may be shown with optional equipment



TAYLOR-DUNN®
Commercial and Industrial Vehicles Since 1949

The best way to go about your business

PERSONNEL CARRIERS



Aristocrat



Roadmaster

BURDEN CARRIERS



Taylortruck



Loadmaster



Model B Series



Electruck



Maintenance Expediter



Stepsaver



Stockchaser

TOW TRACTORS



Towmaster



Mule






Pullmaster



Model E



Huskey

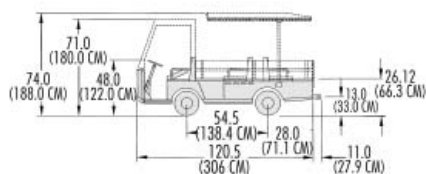

BURDENMASTER STANDARD SPECIFICATIONS

Product Line

MODEL G1-50

| | |
|----------------------------|--|
| Unit Weight | 1,360 lbs. (618 kg.) |
| Load Capacity | 1,500 lbs. (680 kg.) |
| Standard Engine | 18 hp, four-stroke gasoline |
| Transmission | Continuously variable pitch V-belt to forward and reverse gearbox |
| Clutch | Automatic centrifugal engagement |
| Differential | Bevel gear, 13.87:1 axle ratio |
| Battery | 12 volt |
| Charging System | 20 amp flywheel alternator |
| Starter: | 12 volt electric with electronic ignition |
| Governor | Oil bath flyweight |
| Speed | 18 mph (29 km/h) |
| Brakes | Seven inch hydraulic drum wheel brakes on rear. Hydraulic disc brakes on front. Hand operated parking brake |
| Tires & Wheels | 5.70x8 Load Range B highway tread pneumatic tires standard |
| Front Suspension | Heavy duty leaf springs, 1-3/4" (4.45 cm) wide |
| Rear Suspension | Independent coil springs with shock absorbers |
| Color | Safety orange, yellow |
| Steering | Automotive style steering gear unit, independent steering column |
| Frame | All steel unitized body, heavy duty 14 gauge smooth plate lacing on all exterior surfaces |
| Bumper | Heavy duty steel |
| Lights, Horns & Indicators | Dual rectangular headlights, dual tail lights, dual stoplights, electric horn |
| Seats | Individual seat suchions, full seat back, seat and back of foam covered with heavy duty black vinyl upholstery |
| Fuel Capacity | 6.3 U.S. gallons (23.8 liters) with tank gauge on dash |
| Fuel Requirements | Unleaded regular only |
| Conformance Standards | Type G, OSHA 1910.178, ANSI B56.8 |

Specifications based on standard vehicle configuration on smooth level surface with unit unloaded.

BURDENMASTER OPTIONAL FEATURES

Accessories

- Strobe light, amber - on pole, or top of cab
- Reverse alarm
- Directional signals
- Hour meter

Deck

- Welding tank cutouts
- Stake sides, removable end gate, 14" high
- Steel sides and end gates, fold down
- Steel panel cargo box

Hitches

- Hitch automatic coupling, trailer
- Hitch pintle trailer
- Hitch 1-7/8" ball and bracket

Cab

- Steel cab with safety glass window
- Metal doors with sliding safety glass window
- Windshield wiper for cab
- Mirrors - left, right and rear

Top Frames

- Fiberglass or surrey top cover with tubular frame
- Surrey top

Frame

- 4-6 passenger seating
- Smooth skin

Color

- White or special paint color
- Undercoating



TAYLOR-DUNN CORPORATION

Commercial and Industrial Vehicles Since 1949



2114 West Ball Road, Anaheim, CA 92804 • (714) 956-4040 • FAX (714) 956-3130
Toll Free (800) 688-8680 Visit our website: www.taylor-dunn.com

Specifications, standard equipment, accessories and modifications subject to change without notice.

LS-G50-21