

RJ-1/2 Cab Catering Truck

- Model CT12-115-IZ
- 12-foot Van Body
- Mounted on Modified Isuzu Chassis

The exclusive Global-designed scissor-lift with two single-stage hydraulic lift cylinders is designed with a 4,000-pound payload capacity to doorsill heights ranging from 63" to 115". The 2-rear mounted stabilizers provide extra stability when deployed.




Narrow-Body Catering Truck

- Model CT16-168-F6
- 16-foot Van Body

The exclusive Global-designed scissor-lift with two single-stage hydraulic lift cylinders is designed with a 6,000-pound payload capacity to doorsill heights ranging from 87" to 168". The 2-rear mounted stabilizers provide extra stability when deployed.



Special features exclusive to Global Catering and Cabin Service Vehicles

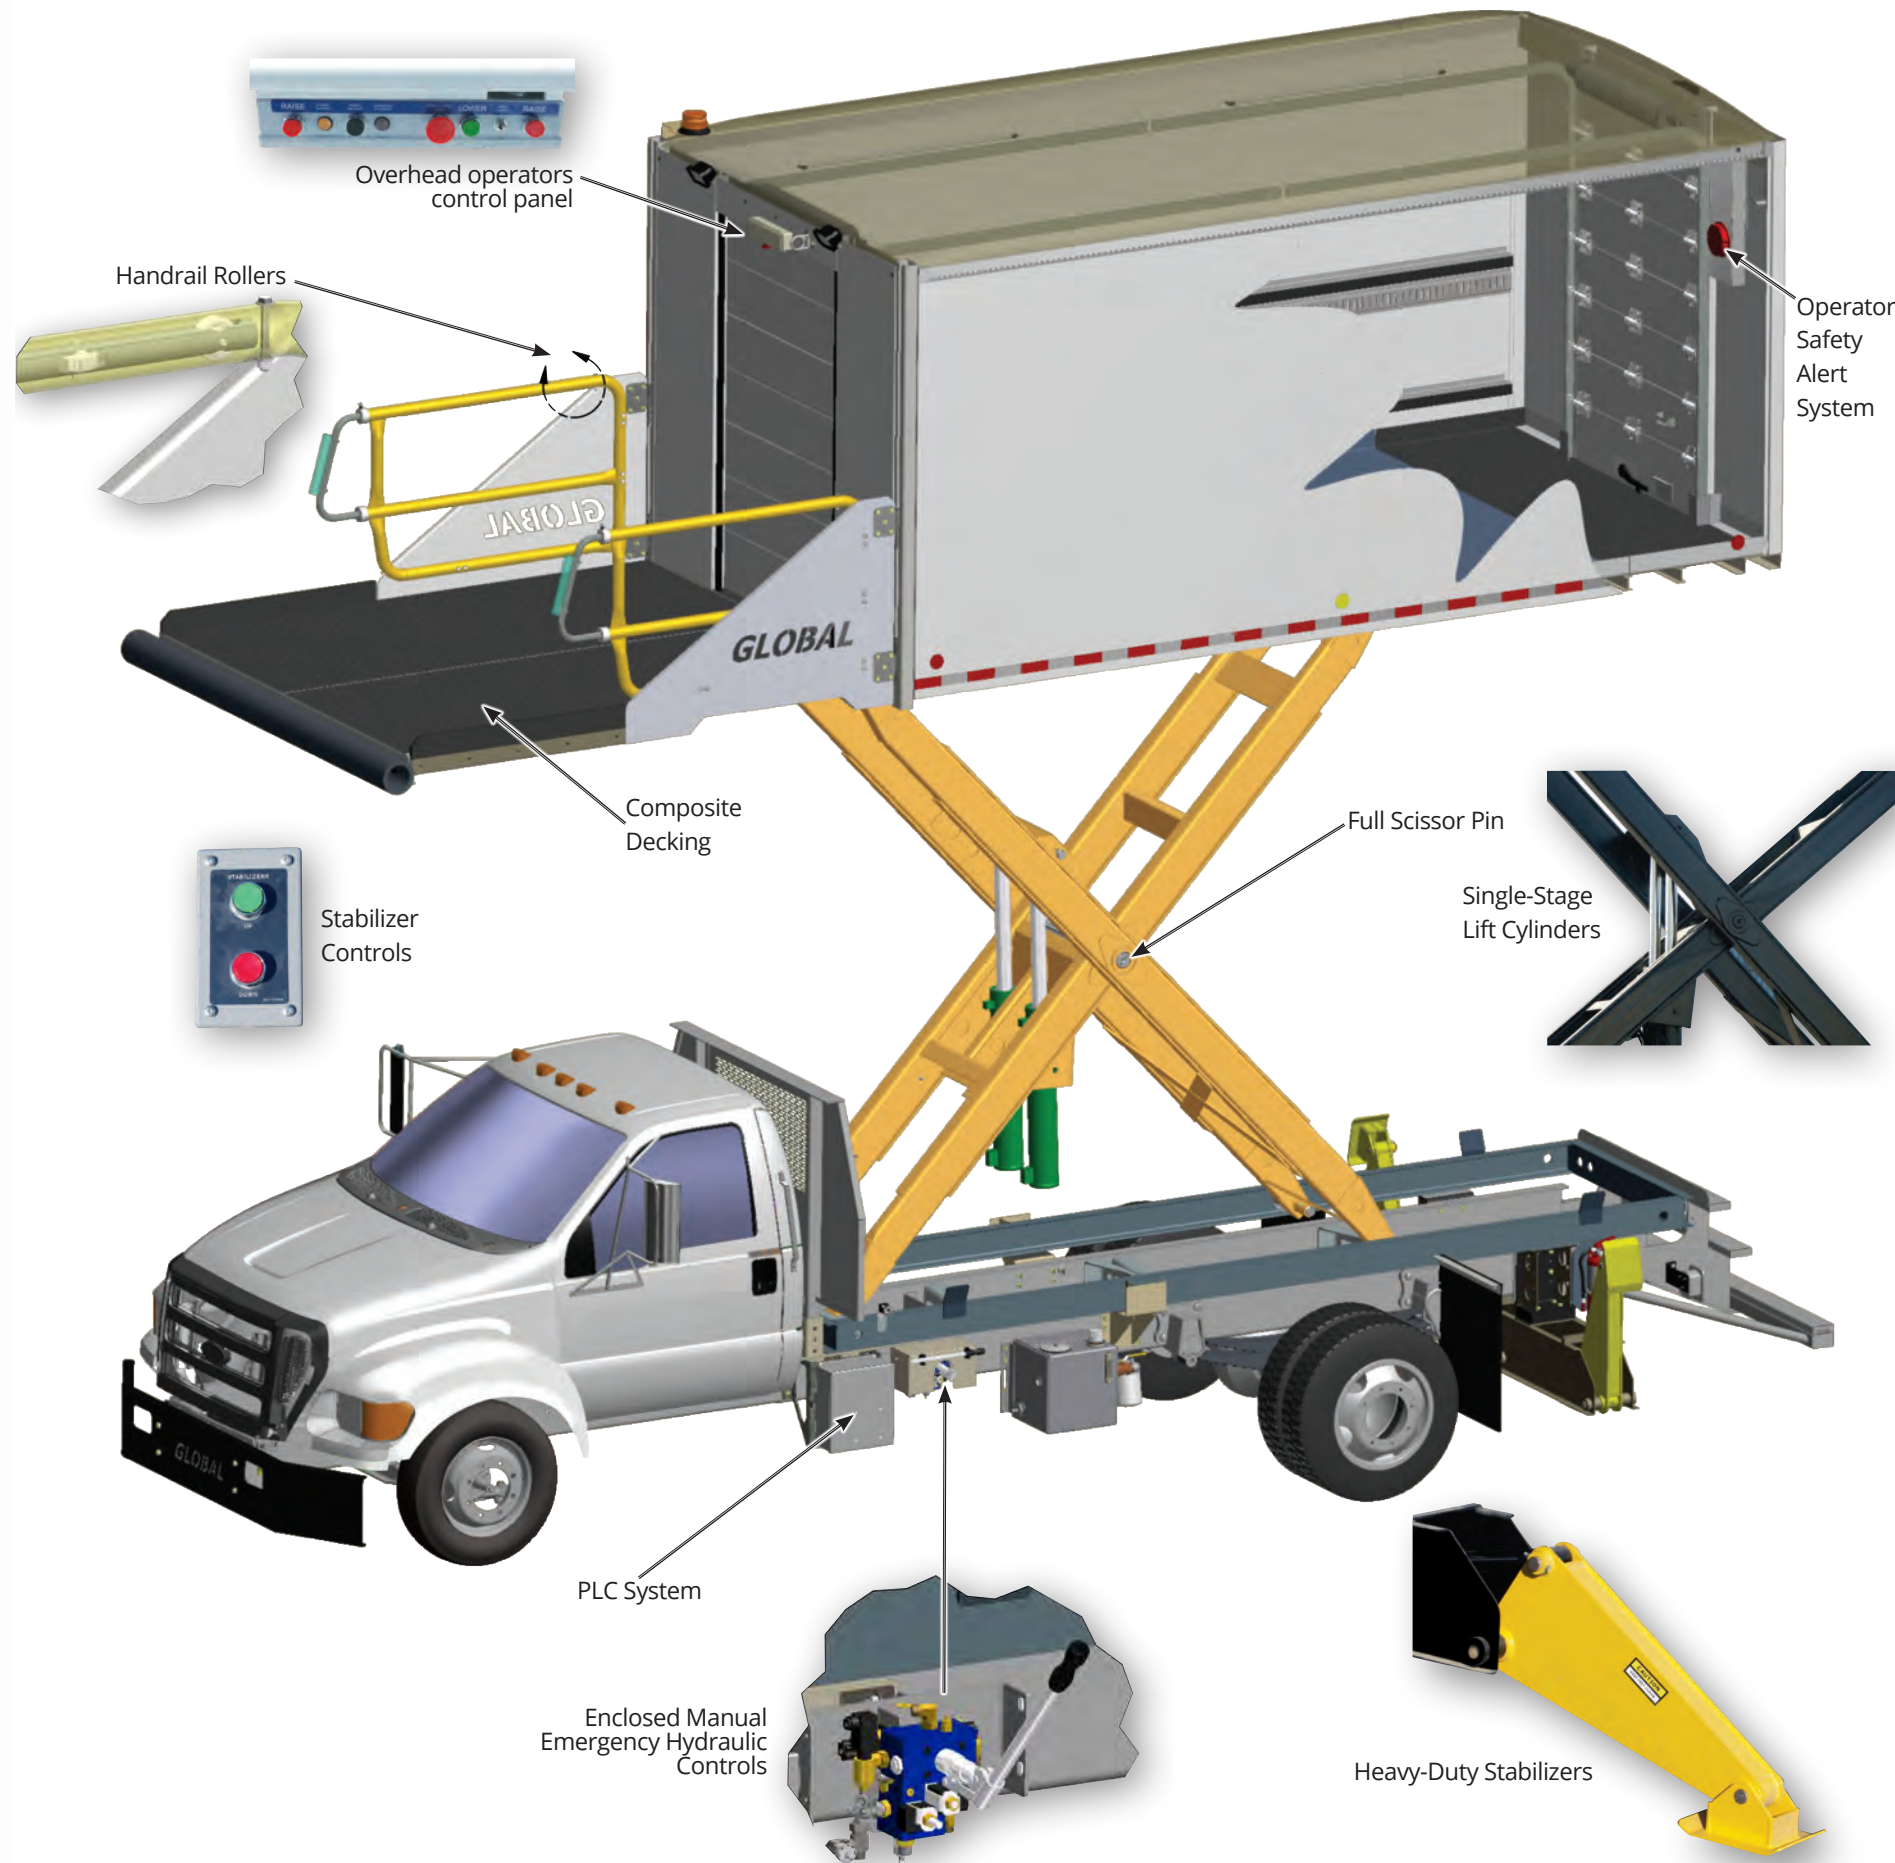

Wide-Body Cabin Service Truck

- Model CS18-228-F7
- 18-foot Van body

The exclusive Global-designed scissor-lift with two single-stage hydraulic cylinders is designed with a 8,000-pound payload capacity to doorsill heights ranging from 96" to 228". The chassis is capable of over-the-road driving as well as aircraft ramp use. With the 2-front mounted and 2-rear mounted stabilizers deployed, the unit meets the 90-mph wind stability industry requirement.



Wide-Body Catering Truck

- Model CT22-228-F7
- 22-foot Van Body

The exclusive Global-designed scissor-lift with two single-stage hydraulic lift cylinders is designed with a 8,000-pound payload capacity to doorsill heights ranging from 99" to 228". The chassis is capable of over-the-road driving as well as aircraft ramp use. With the 2-front mounted and 2-rear mounted stabilizers deployed, the unit meets the 90-mph wind stability industry requirement.



	Wide-Body Cabin Service CS18-228-F7	Wide-Body Catering CT22-228	Narrow-Body Catering 16-168-F6	RJ-1/2 Cab Catering 12-115-1Z
Overall Dimensions				
Overall Length	33'	33'	27'10"	19'
Overall Height	12'	12"	11'5"	10'
Overall Width	102"	102"	102"	102"
Weight Empty	23,300 lbs. (depending on options)	23,300 lbs. (depending on options)	20,000 lbs. (depending on options)	9,500 lbs. (depending on options)
Van Body				
Exterior Length	221"	269"	197"	144"
Exterior Width	102"	102"	102"	96"
Interior Height	89"	89"	91"	80"
Capacity Rating	8,000 lb. capacity	8,000 lb. capacity	6,000 lb. capacity	4,000 lb. capacity - total
Van Body Floor Height				
Fully Raised	228"	228"	168"	115"
Fully Lowered	52"	52"	51"	47"
Forward Platform				
Width	98"	98"	98"	42"
Length	102"	102"	102"	42"
Height (van down)	98" (depending on options)	98" (depending on options)	87" (depending on options)	63"
Capacity Rating	2,000 lbs.	2,000 lbs.	2,000 lbs.	600 lbs.
Hydraulic System				
Drive	Transmission Mounted PTO	Transmission Mounted PTO	Transmission Mounted PTO	Transmission Mounted PTO
Reservoir Capacity	25 Gallon	25 Gallon	25 Gallon	25 Gallon
Fluid Type	DTE 13 or equivalent	DTE 13 or equivalent	DTE 13 or equivalent	DTE 13 or equivalent
Control Valves	12 VDC Solenoid	12 VDC Solenoid	12 VDC Solenoid	12 VDC Solenoid
Emergency Hand Pump	Stabilizer Retract	Stabilizer Retract	Stabilizer Retract	Stabilizer Retract
Emergency Van Body Lowering	Gravity Down - manual	Gravity Down - manual	Gravity Down - manual	Gravity Down - manual
Lift Cylinders	Single-Stage	Single-Stage	Single-Stage	Single-Stage
Electrical System				
Voltage	12 VDC	12 VDC	12 VDC	12 VDC



CATERING & CABIN SERVICE TRUCKS



- ### Optional Equipment Upgrades
- ✓ Spare Tire & Wheel
 - ✓ 4-way Platform
 - ✓ Power Tailgate (Lift Gate)
 - ✓ Van Body Seating
 - ✓ Roll-up Door Window
 - ✓ Refrigeration
 - ✓ Fibreglass Reinforced Plywood (RFP) Van Body
 - ✓ Rear Steps
 - ✓ Van Body Insulation
 - ✓ Fold Down Shelving
 - ✓ Hand-held Fire Extinguisher
 - ✓ LED Lighting
 - ✓ Timed Chassis Shutdown

Global Headquarters

Headquarters is located in Olathe, Kansas. Global is a subsidiary of AirT Incorporated, a public-held company. The manufacturing facility utilizes state-of-the-art design, manufacturing and service capabilities to provide the best value in equipment and services in the industry. The best and brightest people from our industry have been a key element to our success.



Printed in the USA



Specifications subject to change without prior notice.

Global Ground Support, LLC
540 East 56 Highway
Olathe, KS 66061-4640 USA

Telephone (913) 780-0300
Facsimile (913) 780-0829

www.globalgroundsupport.com

