


BELT LOADER

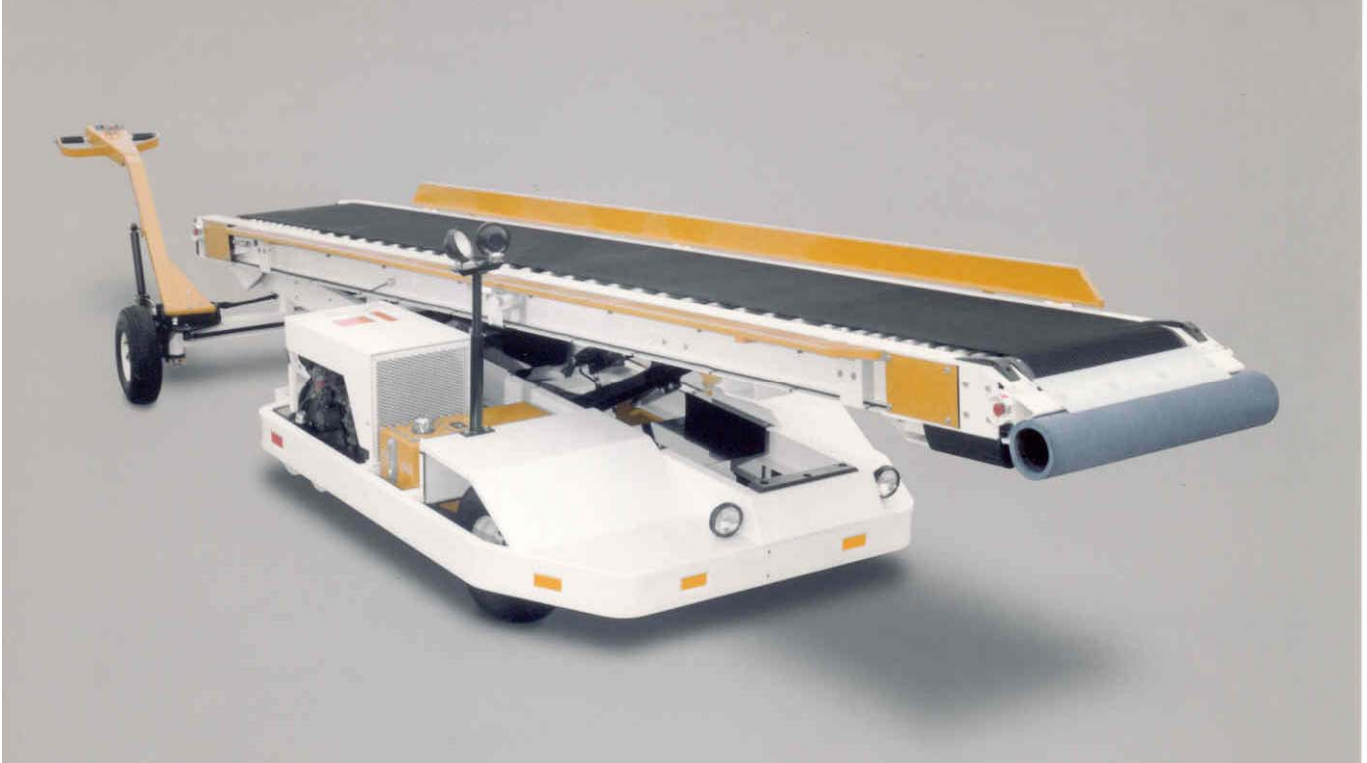

FEATURES:

- Kohler® “Command 18” Gasoline Engine
- Variable Speed Belt with Controls Mounted at Both Ends of Belt
- Automatic Hydraulic Braking
- Pneumatic Tires
- Easily Towable
- Flip-Up Package Guides Standard
- Tiller Arm is Stowable During Operation
- Four Emergency Stops
- Epoxy Powdercoated per Customer Color


OPTIONAL:

- Rear Lift Kit
- Perkins® Diesel Engine
- Hot Dip Galvanizing

“FIRST CLASS DOESN’T HAVE TO COST MORE”

Watkins Aircraft Support Products
Box 249 ■ Glenwood, MN 56334
(320) 634-5885 FAX (320) 634-5881

WALK BEHIND BELT LOADER

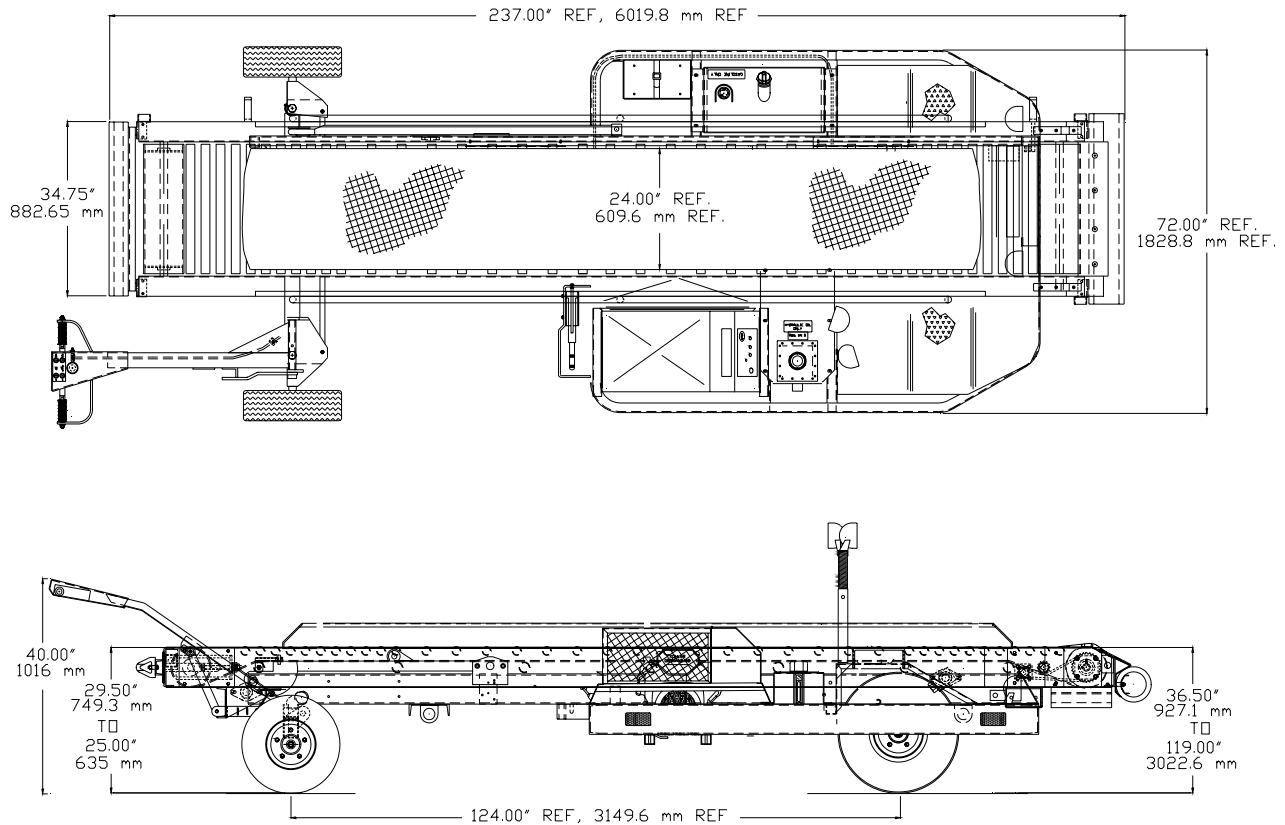

SPECIFICATIONS:

AIRCRAFT COMPATIBILITY:

The unit will service all aircraft having lower lobe doorsill heights ranging from 36-1/2" (927.1 mm) to 108" (2743.2 mm), 119" (3022.6 mm) Optional.

CONVEYOR BED:

Length: 237" (6019.8 mm), 296" (7518.4 mm) Optional
Width: 34-3/4" (882.65 mm)
Belt Width: 24" (609.6 mm)
Belt Speed: 0-100 fpm
Belt Movement: Forward-Stop-Reverse Positions
Belt Support: Roller Bed

TRANSMISSION AND DRIVE AXLE:

Type: Hydraulic Motor/Differential
Speeds: Variable Forward and Reverse

TIRES:

Rear: 5.70 x 8 Pneumatic
Front: 6.90 x 9 Pneumatic

BRAKES:

Dynamic: Automatic
Parking: Manual Disc (Orscheln lever and cable)

FUEL SYSTEM:

Fuel Pump: Mechanical
Fuel Tank: Steel with Sight Gauge, Vented Cap; 15 Gallon (60.57 Liter) Capacity

STEERING SYSTEM:

Type: Manual

HYDRAULIC SYSTEM:

Hydraulic Tank: Steel with Sight Gauge and Breather Cap; 18 Gallon (68.14 Liter) Capacity