## BAGGAGE / CARGO CART



## **HEAVY DUTY RIGID MOUNT MODEL**


- Up to 8000 lbs. (3628.74 kg) Cargo Capacity
- 20-25 MPH Towing Speed
- Rigid Mounted Running Gear
- Fifth Wheel Steering Anti-Friction Timken Bearings, Permanently Lubed and Sealed
- All Sealed Bearings
- **■** Towbar Actuated Front Wheel Brakes
- Full 360° Rotation Fifth Wheel
- Epoxy Powdercoated per Customer Color
- Hot Dip Galvanizing Optional


#### **OPTIONAL:**

- Right Side or Left Side or Both Sides Open
- 5' x 10' (1524 mm x 3048 mm) or 5' x 12' (1524 mm x 3657.6 mm) Available
- Bolt-In Shelf
- Flat or V-Style Floor
- Solid or Pneumatic Tires

"FIRST CLASS DOESN'T HAVE TO COST MORE"

# Baggage / Cargo Cart

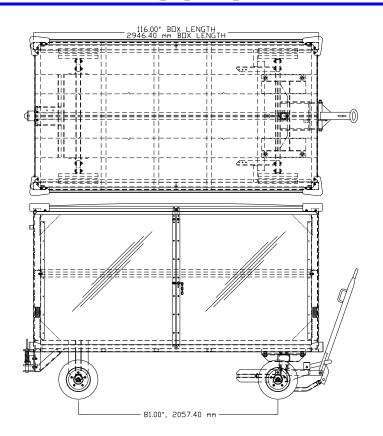



## HEAVY DUTY RIGID MOUNT MODEL

#### **SPECIFICATIONS:**

CAPACITY: 8000 lbs. (3628.74 kg)

WEIGHT: 1500 lbs. (680.39 kg), Approximately.

TRACK WIDTH: 52.75" (1339.9 mm)

RIMS: 9 GA., 5-bolt, 4-1/2" B.C., 2-piece Demountable.

TIRES: Pneumatic or Foam Filled - 4.80 x 8, 5.70 x 8 or 6.90 x 9; Solid - 4.00 x 8, 16" Dia.; 5.00 x 8, 18" Dia.

REAR HITCH: Spring-loaded, E-type – Standard.

Other types – Optional.

WHEEL SPINDLES: 1-5/8" Dia., Replaceable.

KING PIN: 2" Dia. stressproof with sealed Timken bearings.

HUBS: 1-1/4" Dia., Sealed Tapered Roller Bearings

AXLE TUBES: 5 x 2 x 3/16 wall, Rectangular Tubing.

BODY PANELS: 16 GA., CR Sheet.

FLOOR PANELS: 12 GA., CR Sheet.

REFLECTORS: 8-3" Dia.; Amber on Front, Red on

Rear - Standard. Other types - Optional.

**CORNER BUMPERS: Smooth Vinyl - Standard.** 

"Magee" Finned - Optional.

**CURTAINS: Vinyl with Webbed Reinforcement.** 

CHAIN GATES: 2/0, Zinc-plated, Machine Chain.

## BAGGAGE / CARGO CART



### KNOCK DOWN MODEL

#### **FEATURES:**


- **■** Reduces Shipping Costs
- Retains Roll-On / Roll-Off Capability
- Two (2) Carts Fit Into Space Normally Occupied By A Single Cart
- Eight (8) Carts Fit 40' Standard Container
- Twelve (12) Carts Fit 40' High Cube Container
- Reassembles With Hand Tools No Welding Needed
- Available in Rigid Mount, Shock Mount or Torsion Axle Configuration See Separate Specification Sheets
- **■** Epoxy Powdercoated per Customer Color


#### **OPTIONAL:**

■ Hot Dip Galvanizing

"FIRST CLASS DOESN'T HAVE TO COST MORE"

# Baggage / Cargo Cart

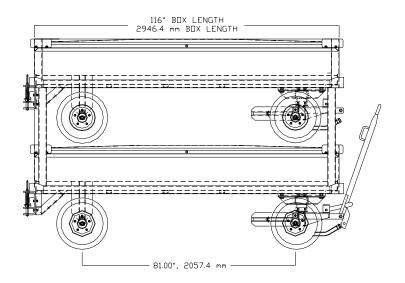



### KNOCK DOWN MODEL

- Available In Both Baggage And Cargo Configurations
- Can Be Fitted With A Center Shelf Or A Back Wall
- Back Wall And Curtain Assemblies Fit Either Side Of Cart -Can Be Changed From Left To Right Side Open In The Field
- Furnished With Photo Illustrated Assembly Instructions